


Duo-Cap

Medium Efficiency Extended Surface Cartridge Filters

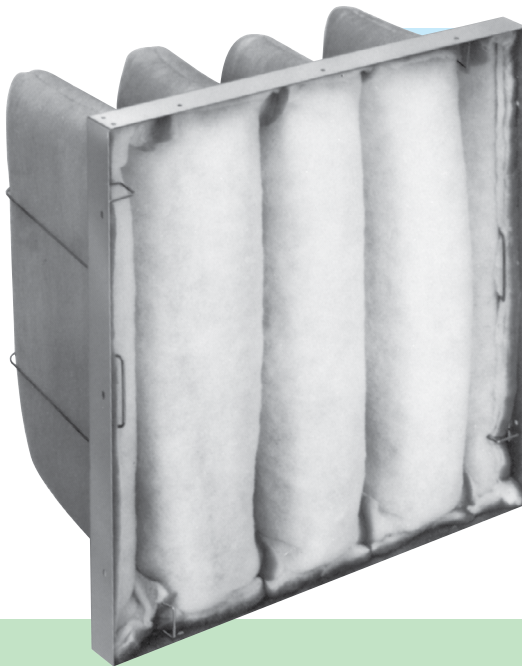

Koch Duo-Cap Cartridge Filters are constructed with a progressively dense synthetic media. (Also available with micro-fiberglass upon request). This graded density construction ensures low resistance to air flow, high dust holding capacity, and prolonged filter lifecycles.

Duo-Cap is designed to fit Cambridge Filter Corporation Hi-Cap and Side-Cap* frame systems without modification to existing framework.

Duo-Cap Technical data

Model No.	Nominal Size	Capacity (CFM)	Media Area (Sq. Ft.)	IPD (in w.g.)
KDC 750	12x24x9	750	6.0	.15
KDC 800	16x20x9	800	7.5	.15
KDC 1050	16x25x9	1050	7.5	.15
KDC 1000	20x20x9	1000	9.0	.15
KDC 1200	20x24x9	1200	9.0	.15
KDC 1225	20x25x9	1200	9.0	.15
KDC 1500	24x24x9	1500	12.0	.15
KDC 1250	12x24x15	1250	10.0	.25
KDC 1400	16x20x15	1400	11.0	.25
KDC 1800	16x25x15	1800	12.5	.25
KDC 1750	20x20x15	1750	12.5	.25
KDC 2000	20x24x15	2000	15.0	.25
KDC 2050	20x25x15	2000	15.0	.25
KDC 2500	24x24x15	2500	20.0	.25

- **MERV 8 performance rating (ASHRAE Test Standard 52.2-2007)**
- **Superior dust holding capacity**
- **Extended filter lifecycles**
- **Low initial pressure drop**

* Competitive brand and trade names are for product identification purposes only.



Regional Sales Offices/Distribution Centers

Atlanta, GA • Detroit, MI • East Greenville, PA* • Houston, TX*
Indianapolis, IN • Kansas City, MO • Louisville, KY* • Madbury, NH
Miami, FL • Nashville, TN • Mira Loma, CA* • Tacoma, WA

*Denotes manufacturing site.



KOCH FILTER[®]

8401 Air Commerce Drive, Louisville, KY 40219
Phone: 502.634.4796 | Fax: 502.637.2280
info@kochfilter.com | www.kochfilter.com