
EKOCHFILTER[®] PURE PERFORMANCE

Multi-Pleat[™] SA Pleated Panel Air Filters for Side-Access Housings



Features

- Constructed of high wetstrength, moisture resistant beverage board
- Die-cut frame provides superior strength durability
- 13/16" peripheral header for easy installation

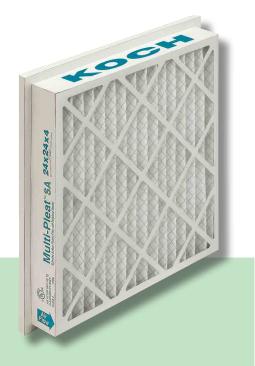



© April 2016 KOCH FILTER CORPORATION

The **Multi-Pleat SA** can be installed without modification, into side-access housings originally designed for bag filters or other space-consuming filters. With 28 square feet of media in the compact 4" frame, the Multi-Pleat SA is an ideal product for retrofit applications where space limitations may restrict the use of other types of air filters which require more space. Each individual pleat is bonded to the die-cut cross supports to insure stability and durability throughout the filter's lifecycle.

THREE EFFICIENCY RANGES

The Multi-Pleat SA is available in three efficiency levels: MERV 8, MERV 11 and MERV 13.

The media for Multi-Pleat SA filters is produced from synthetic fibers designed specifically for use in extended surface air filters. Multi-Pleat SA media offers an excellent combination of media strength, high dust holding capacity, and low resistance to air flow.

Multi-Pleat[™] SA Technical Data

SIZE	FILTER SIZE	CAPACITY	INITIAL PRESSURE DROP			MEDIA AREA
(Nominal)	(Actual)	(CFM)	MERV 8	MERV 11	MERV 13	(SQ. FT.)
24x24x4	23-3/8 x 23-3/8 x 3-7/8	2000	0.34	0.38	0.51	26
12x24x4	11-3/8 x 23-3/8 x 3-7/8	1000	0.34	0.38	0.51	12
20x24x4	19-3/8 x 23-3/8 x 3-7/8	1500	0.34	0.38	0.51	21

Regional Sales Offices/Distribution Centers

Atlanta, GA • Detroit, MI • East Greenville, PA* • Houston, TX* Indianapolis, IN • Kansas City, MO • Louisville, KY* • Madbury, NH Miami, FL • Nashville, TN • Mira Loma, CA* • Tacoma, WA

*Denotes manufacturing site.

EKOCHFILTER[®]

8401 Air Commerce Drive, Louisville, KY 40219 Phone: 502.634.4796 | Fax: 502.637.2280 info@kochfilter.com | www.kochfilter.com